


SUBSTITUTE SHEET (RULE 26)

WO 2005/041458 PCT/US2003/029910

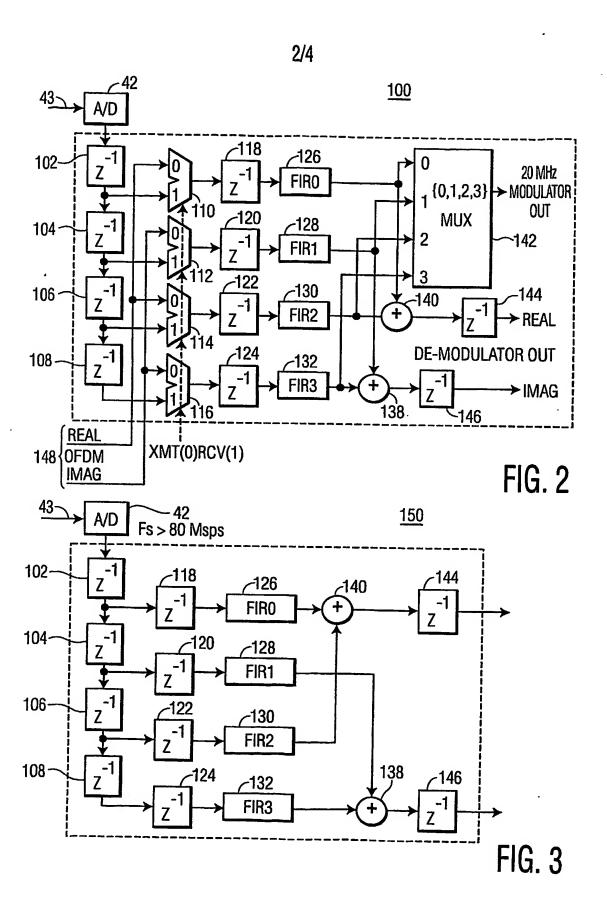

3/4

<u>200</u>

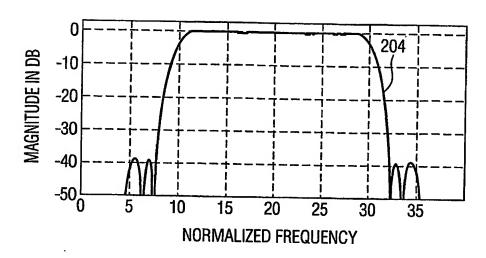


FIG. 4A

<u>202</u>


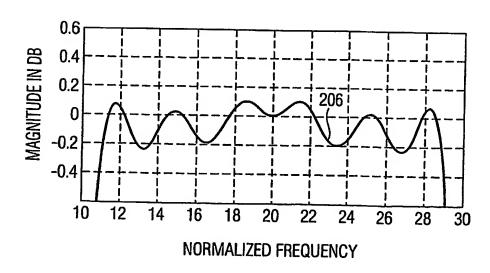


FIG. 4B

4/4

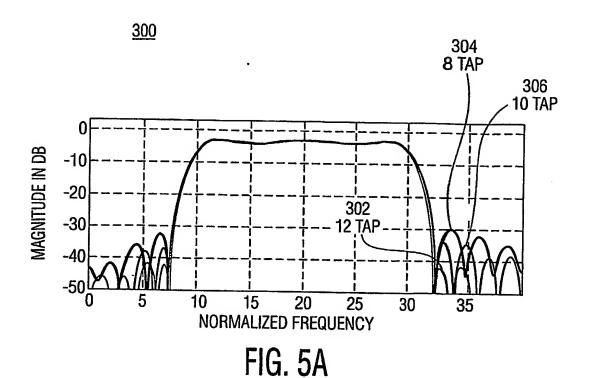

404 10 TAP 402 12 TAP 406 8 TAP MAGNITUDE IN DB 0.5 0 -0.5 -1 10 12 14 16 18 20 22 24 26 28 **NORMALIZED FREQUENCY** FIG. 5B <u>400</u>